



PERSONAL
COMPUTERS



SMALL
COMPUTERS
NETWORK

critical
POWER SUPPLIES

Win Dialog Plus

400-800 VA single-phase

Win Dialog Plus 400-800 VA



The WIN DIALOG PLUS series includes the 400-600-800VA models and uses digital technology. The load is powered from the mains through an AVR to stabilise brownout, sag and surge voltages, and EMI filters to suppress spikes and transients. When the mains fails, the load is powered by the inverter with a pseudo sinewave to provide sufficient runtime for computer system shutdown using the PowerShield³ software supplied as standard.

CHARACTERISTICS

- Mains power supply stabilisation and filtering (technology with AVR and filters for atmospheric disturbance suppression)
- Cold Start capability: the UPS can power up without a mains supply present
- High reliability with built-in battery test feature
- Supplied with 2 output cables

ADVANCED COMMUNICATION


- Advanced, multi-platform communication for all operating systems and network environments: PowerShield³ monitoring and shut-down software included, for Windows 2008, Vista, 2003, XP; Mac OS X, Linux, and the Sun Solaris operating system.
- Advanced communication (standard USB interface)

2 YEAR WARRANTY

MODELS	WP 40U	WP 60U	WP 80U
POWER	400VA/240W	600VA/360W	800VA/480W
INPUT			
Rated voltage	220-240 Vac		
Voltage range	230 Vac (+20/-26%)		
Frequency	50/60 Hz auto sensing		
OUTPUT			
Voltage on mains operation	230 Vac (-8%, +10%)		
Voltage on battery operation	230 Vac (+/- 5%)		
Frequency on battery operation	50 or 60 Hz (+/- 0.5%)		
Waveform from battery/inverter	Pseudo sinewave		
BATTERIES			
Type	VRLA AGM Maintenance-free lead-acid		
Recharge time	6-8 h		
ENVIRONMENTAL			
Weight (kg)	5.8		6.2
Dimensions (HxWxD) (mm)	152 x 110 x 325		
Communication	USB		
Compliance	EN 62040-1-1 and Directive 2006/95/EC; EN 62040-3 EN 62040-2 and Directive 2004/108 EC		
Operating temperature	0°C ÷ +40°C		
Colour	Dark grey RAL 7016		
Altitude and relative humidity	6000 meters max. elevation, < 95% non condensing		
Accessories provided	2 output supply cables, communication software; user guide		

Win Dialog Plus 400-800 VA

WP 40U
WP 60U
WP 80U

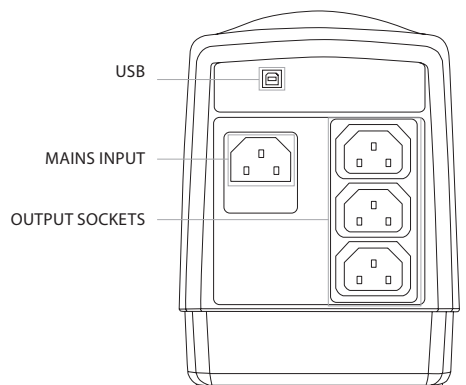

TECHNICAL DETAILS